


Datasheet

# Absen Polaris PL2.9 V10

The robust Black SMD2121 LEDs and popular Polaris frame make the PL2.9 V10 material ideal for the rental market. Like the entire series, the panels are lightweight and easy to handle - thanks to the Auto-Lock system. A concave or convex curved LED wall can be flexibly set up indoors.

Pixel Pitch	2.9 mm
LED Type	Black SMD 3in1 2121
Resolution	168×168
Panel Dimensions (W×H×D)	500×500×88 mm
Panel Weight	8 kg
Brightness	1,200 nit
Refresh Rate	3,840 Hz
Gray Scale	14 Bit
Contrast Ratio	7,000:1
Viewing Angle (h/v)	140° / 140°
Operating Temperature	-10~ °C / +40 °C
IP Rating (Front / Rear)	IP40 / IP21
Power Consumption per Panel	100% White 135W, 60% Content Mix 80 W
Module Maintenance	Front / Rear
Panel Installation Type	Rigging / Stacking
Max. Rigging Quantity (vertical)	20 Panels
Curving (convex & concave)	-7.5° up to +10°

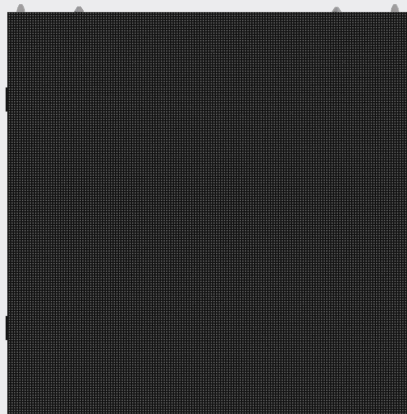

✓ The Price-Performance Winner

Do you have any questions?  
Our sales team is happy to assist you!

✉ [vertrieb@niclen.de](mailto:vertrieb@niclen.de)

☎ +49 231 99961 0