


Datasheet

Absen Polaris PL4.8 Pro (XL)

Flexibility redefined. Thanks to Blackface LEDs and its high brightness, the Polaris PL4.8 Pro material is perfectly designed for both indoor and outdoor applications. The extremely lightweight panels come in a touring dolly, making them incredibly easy to set up. Like the entire Polaris series from Absen, the 4.8 Pro also features the proven Auto-Lock magnet system.

Pixel Pitch	4.8 mm
LED Type	Common Cathode Black SMD 1921
Resolution	104×104 / 104×208
Brightness	4,500 nit
Refresh Rate	3,840 Hz
Gray Scale	14 Bit
Panel Dimensions (W×H×D)	500×500×87 mm / 500×1000×87 mm
Panel Weight	9.5 kg / 12.5 kg
Contrast Ratio	7,000:1
Viewing Angle (h/v)	140° / 120°
Operating Temperature	-20~° C bis +50° C
IP Rating (Front/Rear)	IP65/IP54
Power Consumption per Panel	100 % White 190 W, 60 % Content Mix 120 W / 100 % White 375 W, 60 % Content Mix 225 W
Module Maintenance	Front / Back
Panel Installation Type	Rigging / Stacking
Max. Rigging Quantity (vertical)	20 Panels / 10 Panels
Curving (convex & concave)	-7,5° up to 10°

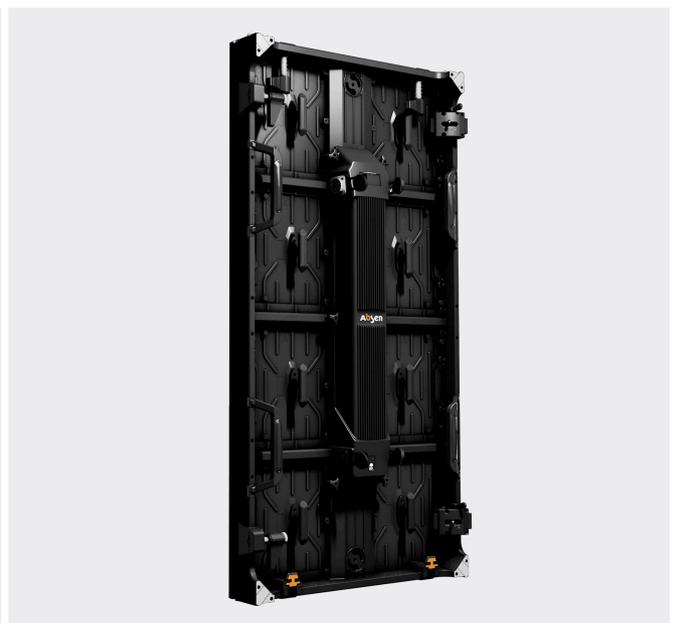

✓ The ideal touring LED material

Do you have any questions?
Our sales team is happy to assist you!

✉ vertrieb@niclen.de

☎ +49 231 99961 0